


GEON® Rigid Dry Blends

GEON Rigid Dry Blends provide performance, quality, and value in a powder solution for profile and sheet manufacturers. Manufacturers can improve part performance while reducing production costs, consumer maintenance, and the risk of field failures versus competing materials.

Solutions

Exterior + Formulated for years of outdoor weathering + Supported by years of weathering data	GEON Rigid + Higher use temperature than PVC + Better flame and chemical resistance than PVC
Interior + Deliver flame, chemical, and UV resistance + Meet agency approvals like NSF and UL	Wood-Plastic Composite Base + Base for adding wood and other natural fibers
Cellular + Replicate the look and feel of decorative wood + Lightweight substrate material	Manufacturer Recipes + Expand production for in-house compounders or manufacturers who prefer their own recipes
Purge + Effectively clean out extruders in between production runs or at shutdown	

Applications

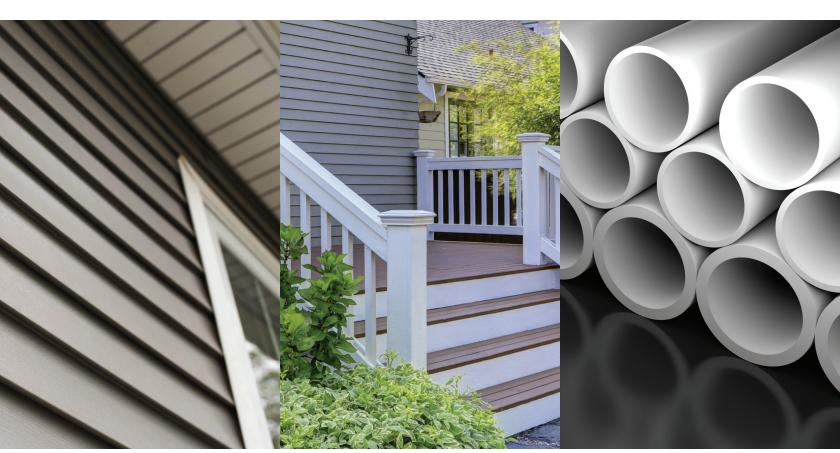



The GEON® Difference



Technology

Simplify Your Supply Chain Broad range of solutions from a single supplier

Improve Cost Efficiency Maximize cost-performance balance with customized formulations

Differentiate with Color Create stand-out products with our color matching expertise

Service

Save Time, Gain Know-How Meet with a sales team that knows the vinyl market

Reduce Risk Minimize risk of part failure with our experience and supporting data

Maximize Production Put our technical team's expertise to work for you

Commitment

Feel Confident

With operations dedicated to Dry Blend, we provide quality that meets or exceeds expectations

Stay Informed

Proud member of associations supporting your industry: AAMA, The Vinyl Institute, American Chemistry Council







Copyright © 2021, GEON Performance Solutions. GEON makes no representations, guarantees, or warranties of any kind with respect to the information contained in this document about its accuracy, suitability for particular applications, or the results obtained or obtainable using the information. Some of the information arises from laboratory work with small-scale equipment which may not provide a reliable indication of performance or properties obtained or obtainable on larger-scale equipment. Values reported as "typical" or stated without a range do not state minimum or maximum properties; consult your sales representative for property ranges and min/max specifications. Processing conditions can cause material properties to shift from the values stated in the information. GEON makes no warranties or guarantees respecting suitability of either GEON's products or the information for your process or end-use application. You have the responsibility to conduct full-scale end-product performance testing to determine suitability in your application, and you assume all risk and liability arising from your use of the information and/or use or handling of any product. GEON MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, either with respect to the information or products reflected by the information. This literature shall NOT operate as permission, recommendation, or inducement to practice any patented invention without permission of the patent owner.